


Surface Bimetal Thermometer

- Measures Temperature of Any Horizontal Surface
- Magnetic Feet Hold to Any Ferrous Surface
- Used on Griddles, Ovens, Motors, Piping, Tanks, etc.

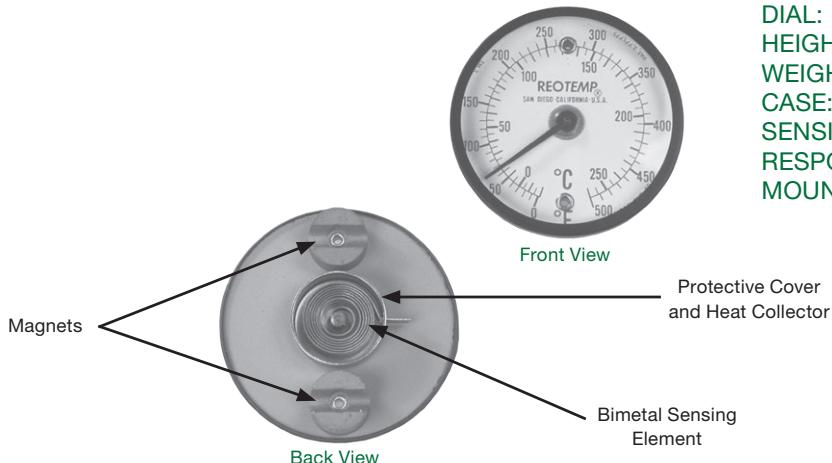

SPECIFICATIONS

ACCURACY: $\pm 2\%$ Full Scale (ASME B40.3)

HEAD: 2" (5.08cm)

DIAL: White background with blue marks and numbers.

HEIGHT: 1/2" (1.27cm)

WEIGHT: Approximately 2 ounces (56.7g)

CASE: Aluminum with Optically Clear Crystal

SENSING ELEMENT: Precision Calibrated Bimetal Coil

RESPONSE TIME: Approximately 1 minute

MOUNTING: Two Magnets on Back

HOW TO ORDER

Model:	Temperature Range:
SUR-15	0 to 150°F & -20 to 65°C
SUR-25	0 to 250°F & -20 to 120°C
SUR-50	0 to 500°F & -20 to 260°C
SUR-75	50 to 750°F & 10 to 400°C

Pocket Bimetal Thermometer



Analog (Dial) Models

Model K-79

- Accurate and Rugged
- Quick Response
- Shock Resistant
- Sensitive Bimetal Element
- External Reset Adjustment
- Waterproof and Dustproof
- Stainless Steel or Plastic Pocket Case

HOW TO ORDER

Analog:	Temperature Range:
K-79-2	-40°F to 160°F
K-79-3	0°F to 220°F
K-79-4	25°F to 125°F
K-79-5	50°F to 550°F
K-79-7	-10°C to 110°C
K-79-8	0°C to 150°C
K-79-9	0°C to 250°C

SPECIFICATIONS

ACCURACY: $\pm 2\%$ Full Scale (ASME B40.3)

HEAD: 1" Diameter (25mm)

DIAL MATERIAL: White background with crisp letters, marks, and numbers.

STEM LENGTH: 142 O.D., 5" long, pointed (36mm x 127mm)

RESET NUT: 7/16 Hex (11mm)

POCKET CASE: Plastic with Clip and Holder Loop

WEIGHT: 0.65 OUNCES (18.5g)

PACKED: 1 per box, 12 per carton